



PTO/SB/21 (09-04)

Approved for use through 07/31/2006. OMB 0651-0031

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**TRANSMITTAL  
FORM**

(to be used for all correspondence after initial filing)

Total Number of Pages in This Submission

Application Number	10/727,488
Filing Date	December 5, 2003
First Named Inventor	Eyal Artsiely
Art Unit	3676
Examiner Name	Lloyd A. Gall
Attorney Docket Number	1295RAV-US

**ENCLOSURES (Check all that apply)**

<input type="checkbox"/> Fee Transmittal Form <input type="checkbox"/> Fee Attached <input type="checkbox"/> Amendment/Reply <input type="checkbox"/> After Final <input type="checkbox"/> Affidavits/declaration(s) <input type="checkbox"/> Extension of Time Request <input type="checkbox"/> Express Abandonment Request <input type="checkbox"/> Information Disclosure Statement  <input checked="" type="checkbox"/> Certified Copy of Priority Document(s) <input type="checkbox"/> Reply to Missing Parts/ Incomplete Application <input type="checkbox"/> Reply to Missing Parts under 37 CFR 1.52 or 1.53	<input type="checkbox"/> Drawing(s) <input type="checkbox"/> Licensing-related Papers <input type="checkbox"/> Petition <input type="checkbox"/> Petition to Convert to a Provisional Application <input type="checkbox"/> Power of Attorney, Revocation Change of Correspondence Address <input type="checkbox"/> Terminal Disclaimer <input type="checkbox"/> Request for Refund <input type="checkbox"/> CD, Number of CD(s) _____ <input type="checkbox"/> Landscape Table on CD	<input type="checkbox"/> After Allowance Communication to TC <input type="checkbox"/> Appeal Communication to Board of Appeals and Interferences <input type="checkbox"/> Appeal Communication to TC (Appeal Notice, Brief, Reply Brief) <input type="checkbox"/> Proprietary Information <input type="checkbox"/> Status Letter <input type="checkbox"/> Other Enclosure(s) (please identify below):
<b>Remarks</b>		

**SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT**

Firm Name	Dekel Patent Ltd.		
Signature	<i>David Klein</i>		
Printed name	David Klein		
Date	May 12, 2006	Reg. No.	41,118

**CERTIFICATE OF TRANSMISSION/MAILING**

I hereby certify that this correspondence is being facsimile transmitted to the USPTO or deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450 on the date shown below:

Signature			
Typed or printed name	David Klein	Date	May 12, 2006

This collection of information is required by 37 CFR 1.5. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to 2 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.



מדינת ישראל  
STATE OF ISRAEL

Ministry of Justice  
Patent Office

משרד המשפטים  
לשכה הפטנטים

This is to certify that  
annexed hereto is a true  
copy of the documents as  
originally deposited with  
the patent application  
particulars of which are  
specified on the first page  
of the annex.

זאת לתעודה כי  
רצופים בזה העתקים  
נכונים של המסמכים  
שהופקדו לכתחילה  
עם הבקשה לפטנט  
לפי הפרטים הרשומים  
בעמוד הראשון של  
הנספח.

ON THE 5/1/2004  
REQUEST WAS RECEIVED  
TO AMEND THE SPECIFICATION.  
A COPY OF THE AMENDED  
SPECIFICATION IS ATTACHED  
HEREBY.

ביום 5/1/2004  
התקבלה בקשת המבקש לתקן את הפירוט.  
העתק נאמן של הדפים "156153/2"  
המתוקנים כפי שהם מסומנים  
מצורפים בזה.

This 0-1-62-2304 היום  
רשם המטנטים  
Commissioner of Patents

CERTIFIED COPY OF  
PRIORITY DOCUMENT

נתאשר  
Certified

לשימוש הלשכה

For Office Use

מספר: 156153/2	Number 156153/2
תאריך: 27-05-2003	Date 27-05-2003
הוקדם/נדחה Ante/Post-dated	

**אני/נו**, (שם המבקש, מענו ולגבי גוף מאוגד - מקום התאגדותו)

**I/We**, (Name and address of applicant, and in case of body corporate - place of incorporation)

RAV-BARIACH VEHICLE PROTECTION LTD.

Rav-Bariach Park

PO Box 643

Yavne 81104

רב בריח הגנה לרכב בע"מ

קריית רב בריח

ת.ד. 643

יבנה 81104

Inventor: Eyal Artsiely

ממציא: אייל ארציאלי

בעל אמצאה בהיותו הממציא ששמה הוא

Owner, by virtue of being the inventor of an invention the title of which is

מנעול רכב רב שימושי

(בעברית)

(Hebrew)

MULTIFUNCTIONAL VEHICLE LOCK

(באנגלית)

(English)

<p><b>בקשת חלוקה -</b> Application of Division</p> <p><b>מבקשת פטנט</b> from Application</p> <p>No..... מס' dated..... מיום</p>	<p><b>בקשת פטנט מוסף -</b> Application for Patent Addition</p> <p><b>לבקשה/לפטנט</b> to Patent/Appl.</p> <p>No..... מס' dated..... מיום</p>	<p><b>דרישה דין קדימה</b> Priority Claim</p>		
<p><b>יפוי-כח:</b> POA:</p> <p>הוגש בענין בקשה 145462 המען למסירת מסמכים בישראל Address for Service in Israel דקל פטנט בע"מ בית הרופאים מנוחה ונחלה 18, חדר 27, רחובות 76209</p>		<p>מספר/סימן Number/Mark</p>	<p>תאריך Date</p>	<p>מדינת האגוד Convention Country</p>
<p>Signature of the Applicant</p> <p>עבור המבקש, For the Applicant, דוד קליין, עו"פ דקל פטנט בע"מ בית הרופאים מנוחה ונחלה 18, חדר 27, רחובות 76209</p> <p>DATE: 27.05.03 REFERENCE: 1295RAV-IL</p>		<p>היום 27 _____ 5 _____ שנת 2003 This 27 of May 2003</p> <p>לשימוש הלשכה For Office Use</p>		

טופס זה, כשהוא מוטבע בחותם לשכת הפטנטים ומושלם במספר ובתאריך ההגשה, הנו אישור להגשת הבקשה שפרטיה רשומים לעיל.  
This form, impressed with the Seal of the Patent Office and indicating the number and date of filing, certifies the filing of the application the particulars of which are set out above.

לשימוש הלשכה  
For Office Use

156153

מספר:  
Number

תאריך:  
Date

27-05-2003

הוקדם/נדחה  
Ante/Post-dated

**אני/ו,** (שם המבקש, מענו ולגבי גוף מאגד - מקום התאגדות)  
**I/We,** (Name and address of applicant, and in case of body corporate - place of incorporation)

RAV-BARIACH SECURITY PRODUCTS LTD.  
Rav-Bariach Park  
PO Box 633  
Yavne 81104

רב בריח מוצרי בטחון בע"מ  
קריית רב בריח  
ת.ד. 633  
יבנה 81104


Inventor: Eyal Artsiely

ממציא: אייל ארציאלי

בעל אמצאה בהיותו הממציא ששמה הוא  
Owner, by virtue of being the inventor of an invention the title of which is

(בעברית)  
מנעול רכב רב שימושי  
(Hebrew)

(באנגלית)  
MULTIFUNCTIONAL VEHICLE LOCK  
(English)

*בקשת חלוקה - Application of Division		*בקשת פטנט מוסף - Application for Patent Addition		דרישה דין קדימה Priority Claim	
*מבקשת פטנט from Application		*לבקשה/לפטנט to Patent/Appl.		מספר/סימן Number/Mark	תאריך Date
No.....מס' dated.....מיום		No.....מס' dated.....מיום			מדינת האגוד Convention Country
יפוי-כח: POA: הוגש בענין בקשה 145462 המען למסירת מסמכים בישראל Address for Service in Israel דקל פטנט בע"מ בית הרופאים מנוחה ונחלה 18, חדר 27, רחובות 76209					
חתימת המבקש For the Applicant, עבד המבקש, דוד קליין, עו"פ דקל פטנט בע"מ בית הרופאים מנוחה ונחלה 18, חדר 27, רחובות 76209 DATE: 27.05.03 תאריך: REFERENCE: 1295RAV-IL סימוכין:					
היום 27 בחודש 5 שנת 2003 This 27 of May 2003 לשימוש הלשכה For Office Use					

טופס זה, כשהוא מוטבע בחותם לשכת הפטנטים ומושלם במספר ובתאריך ההגשה, הנו אישור להגשת הבקשה שפרטיה רשומים לעיל.  
This form, impressed with the Seal of the Patent Office and indicating the number and date of filing, certifies the filing of the application the particulars of which are set out above.

מנעול רכב רב שימושי

**MULTIFUNCTIONAL VEHICLE LOCK**

1295RAV-IL

## MULTIFUNCTIONAL VEHICLE LOCK

### FIELD OF THE INVENTION

The present invention relates generally to vehicle locks and particularly to a lock that simultaneously locks at least two movable elements of a vehicle.

### BACKGROUND OF THE INVENTION

Many kinds of security locks are known for locking vehicle doors and systems. For example, devices are known that lock the engine hood, or which lock access to the trunk. Other devices lock the gearshift lever, the steering wheel or hand brakes, for example.

Czech published patent document CZ 289123 describes a locking system for simultaneous blocking two or more movable elements of a motor vehicle. The locking system may be key operated or non-key operated. The locking system includes at least two blocking pins arranged to simultaneously block two movable elements of a vehicle, for example, a gearshift lever and a hand brake. A locking mechanism is provided that includes a main body and a rotary system. A plurality of connecting elements link the blocking pins to the rotary system. The rotary system includes a rotary pulley having at least two recesses, to which the connecting elements are attached. Rotation of the rotary pulley simultaneously actuates the blocking pins to block or unblock the vehicle movable elements. Rotation of the rotary pulley either pulls the connecting elements to the blocking pins or pushes the connecting elements to the blocking pins; there is no combination of pushing and pulling.

### SUMMARY OF THE INVENTION

The present invention seeks to provide an improved and novel multifunctional vehicle lock that simultaneously locks at least two movable elements of a vehicle, as is described more in detail hereinbelow.

There is thus provided in accordance with an embodiment of the present invention a multifunctional vehicle lock comprising a cylinder lock comprising a rotatable tumbler, a coupling member rotationally linked to the tumbler, wherein rotation of the tumbler rotates the coupling member, a first vehicle locking element connected to the coupling member, and a second vehicle locking element connected to the coupling member, wherein rotation of the coupling member moves the first vehicle locking element in a translatory movement along a first axis and simultaneously moves the second vehicle

locking element in a translatory movement along a second axis angled at a non-zero angle with respect to the first axis.

In accordance with an embodiment of the present invention the coupling member comprises a worm drive connected to the first vehicle locking element.

Further in accordance with an embodiment of the present invention the first vehicle locking element is connected to the coupling member by a pin that fits in a helical groove formed in the worm drive, wherein as the coupling member rotates, the pin translates along the first axis guided by the helical groove.

Still further in accordance with an embodiment of the present invention the helical groove has a terminal arcuate portion in which the pin is geometrically lockable with respect to the coupling member.

In accordance with an embodiment of the present invention the second vehicle locking element is connected to the coupling member by means of a wrist pin and connecting element connection.

Further in accordance with an embodiment of the present invention the tumbler of the cylinder lock comprises a set of tumbler pins that are movable to a shear line against a set of housing pins disposed in a first pin housing.

Still further in accordance with an embodiment of the present invention a second pin housing may be provided wherein the tumbler pins are movable to a shear line against a set of housing pins disposed in the second pin housing.

In accordance with an embodiment of the present invention the first and second lock elements are arranged to move in and out of a protective casing.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be understood and appreciated more fully from the following detailed description, taken in conjunction with the drawings in which:

Figs. 1 and 2 are simplified front exploded and rear perspective illustrations, respectively, of a multifunctional vehicle lock, constructed and operative in accordance with an embodiment of the present invention, in a retracted orientation;

Fig. 3 is a simplified cutaway pictorial illustration of the multifunctional vehicle lock of Fig. 1, showing inner elements of the lock constructed and operative in accordance with an embodiment of the present invention, in a retracted orientation;

Fig. 4 is a simplified cutaway pictorial illustration of the multifunctional vehicle lock of Fig. 1, halfway between retracted and extended orientations;

Fig. 5 is a simplified cutaway pictorial illustration of the multifunctional vehicle lock of Fig. 1, in an extended orientation;

Fig. 6 is a simplified rear perspective illustration of the multifunctional vehicle lock of Fig. 1, in an extended orientation;

Figs. 7 and 8 are simplified rear perspective illustrations of the multifunctional vehicle lock of Fig. 1, with a plurality of side-extending locking elements in respective retracted and extended orientations;

Fig. 9 is a simplified rear perspective illustration of the multifunctional vehicle lock of Fig. 1, with a locking attachment assembled on a first locking element of the multifunctional vehicle lock;

Fig. 10 is a simplified rear perspective illustration of the multifunctional vehicle lock of Fig. 1, with a locking attachment assembled on a second locking element of the multifunctional vehicle lock;

Fig. 11 is a simplified rear perspective illustration of the multifunctional vehicle lock of Fig. 1, with a plurality of locking attachments assembled on a pair of side-extending locking elements and a flexible locking attachment assembled on a linear extending locking element of the multifunctional vehicle lock; and

Fig. 12 is a simplified rear perspective illustration of the multifunctional vehicle lock of Fig. 1, with a guide support that supports a locking attachment assembled on a linear extending locking element of the multifunctional vehicle lock.

#### DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

Reference is now made to Figs. 1-4, which illustrate a multifunctional vehicle lock 10, constructed and operative in accordance with an embodiment of the present invention.

Lock 10 may comprise an outer protective casing 12 in which a cylinder lock 14 is disposed. Cylinder lock 14 has a keyway 16 in which a key (not shown) may be inserted to turn lock 14 and actuate a first vehicle locking element 18 and a second vehicle locking element 20, as is described more in detail hereinbelow. (First and second vehicle locking elements 18 and 20 are also simply referred to herein as first and second locking elements 18 and 20.) First locking element 18, operatively connected to lock actuator 14, may be selectively moved in and out of outer casing 12 in a translatory movement along a first axis 22. Second locking element 20 may be selectively moved in and out of a side protective casing 24, secured to outer casing 12, in a translatory movement along a second axis 26 angled at a non-zero angle (e.g., 90°) with respect to first axis 22. The



protective casings 12 and 24 may be made of any suitable material, such as but not limited to, a hardened steel alloy.

It is noted that the invention is not limited to a key-actuated lock. Rather the invention encompasses any kind of actuatable lock, such as but not limited to, a motor-driven tumbler (e.g., with an electric, hydraulic, or pneumatic motor and the like) or a turn-knob instead of a key.

As seen in Fig. 1, an inner protective casing 28 may also be provided, and first locking element 18 may be selectively moved in and out thereof. It is appreciated that this is just one example of a suitable construction for the elements of lock 10, and the present invention is not limited to the illustrated embodiment.

Reference is now made to Figs. 3-5, which illustrate inner elements of lock 10 and their operation, in accordance with an embodiment of the present invention.

Cylinder lock 14 may comprise a rotatable tumbler 30. Tumbler 30 may comprise a set of tumbler pins 32 (seen in Fig. 4) that are movable to a shear line 34 against a set of housing pins 36 (shown simplistically in broken lines in Fig. 3) disposed in a first pin housing 38 and a second pin housing 40. The presence of two pin housings 38 and 40 permits removing the key (not shown) from cylinder lock 14 at more than one angular position. The pin housings 38 and 40 may be arranged at any angular orientation with respect to one another. In the illustrated embodiment, pin housings 38 and 40 are arranged at 180° from each other, but it is appreciated that the invention is not limited to this arrangement.

A coupling member 42 may be rotationally linked to tumbler 30, wherein rotation of tumbler 30 rotates coupling member 42. Both first and second locking elements 18 and 20 may be connected to coupling member 42, wherein rotation of coupling member 42 moves first locking element 18 in a translatory movement along first axis 22 and simultaneously moves second locking element 20 in a translatory movement along second axis 26, as is now described.

Coupling member 42 may comprise a worm drive that includes one or more helical grooves 44. First locking element 18 may be coupled to coupling member 42 by a pin 46 that fits in helical groove 44, wherein as coupling member 42 rotates, pin 46 translates along first axis 22 guided by helical groove 44. In Fig. 3, pin 46 is at one end (the right end in the sense of Fig. 3) of coupling member 42. As coupling member 42 rotates in the direction of an arrow 45, pin 46 advances along first axis 22 as indicated by arrow 47 in Fig. 4. First locking element 18 also advances along first axis 22 together

with pin 46, until pin 46 and first locking element 18 reach an extended position shown in Fig. 5. First locking element 18 may pass through a collar 43. Helical groove 44 may have a terminal arcuate portion 48 in which pin 46 may be geometrically locked with respect to coupling member 42 in the extended position, as seen in Fig. 5. Alternatively or additionally, pin 46 may be geometrically locked with respect to coupling member 42 at the retracted position or any position therebetween.

Coupling member 42 may have a terminal member 49 secured thereto, to which second locking element 20 may be connected by means of a connecting element 50 pivotally connected to terminal member 49 by means of a wrist pin 52. Terminal member 49 may be secured to coupling member 42 by any suitable means, such as but not limited to, a pinned connection wherein pins (not shown) from inner protective casing 28 mate with holes 23 in terminal member 49 (see Fig. 1). Terminal member 49 may be formed with a central aperture 25 (Fig. 1) for first locking element 18 to pass therethrough. Connecting element 50 may be also pivotally connected to second locking element 20 by means of another wrist pin 54.

As coupling member 42 rotates in the direction of arrow 45 (Fig. 4), connecting element 50 pushes second locking element 20 in the direction of an arrow 58 out through casing 24 (shown in Figs. 1 and 2). Further rotation of coupling member 42 in the direction of arrow 45 pushes second locking element 20 further out through casing 24 in the direction of arrow 58 to the extended position seen in Fig. 5. Second locking element 20 is geometrically locked in the extended position of Fig. 5 because of the rotational position of connecting element 50 and second locking element 20. Any force along axis 26 in the direction towards collar 43 cannot turn terminal member 49 in the direction opposite to arrow 45. It is noted that connecting element 50 may include an abutting surface 56, which in the extended position of Fig. 5, is also brought into geometrically locked engagement with collar 43.

Fig. 6 illustrates (in a rear perspective view) the multifunctional vehicle lock 10 in an extended orientation, corresponding to the orientation of Fig. 5.

It is appreciated that first and second locking elements 18 and 20 may be brought back to the retracted position by the opposite rotation of tumbler 30.

The invention is not limited to a single side-extending second locking element 20. Figs. 7 and 8 illustrate multifunctional vehicle lock 10 with a plurality of side-extending locking elements 20 in respective retracted and extended orientations. Any number of locking elements may be provided with lock 10. The connecting elements 50 that

pivotally connect second locking elements 20 to terminal member 49 may have different or equal lengths and may be connected at different or equal radii with respect to the center of rotation of coupling member 42 (or terminal member 49), such that second locking elements 20 are extendable to different or equal lengths.

First and second locking elements 18 and 20 may comprise attachment members 33, such as but not limited to, attachment grooves formed at ends thereof. Attachment members 33 may be used to attach locking attachments to first and second locking elements 18 and 20, non-limiting examples of which are now described.

Reference is now made to Fig. 9, which illustrates a locking attachment 60 assembled on first locking element 18. Locking attachment 60 may comprise an elongate wire 62 useful for locking vehicle hoods, trunks, gas caps and other vehicle accessories. Locking attachment 60 may be connected to attachment member 33 by means of an adapter 64 that fits into attachment member 33 and into a groove 66 formed in locking attachment 60. Fig. 10 illustrates locking attachment 60 alternatively assembled on second locking element 20. Fig. 10 shows that adapter 64 may be provided in any length, size or shape.

Reference is now made to Fig. 11, which illustrates a pair of side-extending locking attachments 60 assembled on a pair of second locking elements 20. Guide supports 158, 160 and 162 of different lengths, sizes and shapes may be provided to support locking attachments 60. In addition, a flexible locking attachment 70 may be assembled on first locking element 18. A flexible guide support 150 may be provided to support flexible locking attachment 70. Fig. 12 illustrates a rigid locking attachment 72, which may be assembled on first locking element 18 and supported by a rigid guide support 152. It is appreciated that these are just some examples and the invention is not limited to these examples.

It will be appreciated by persons skilled in the art that the present invention is not limited by what has been particularly shown and described hereinabove. Rather the scope of the present invention includes both combinations and subcombinations of the features described hereinabove as well as modifications and variations thereof which would occur to a person of skill in the art upon reading the foregoing description and which are not in the prior art.


7  
C L A I M S

What is claimed is:

1. A multifunctional vehicle lock comprising:  
a cylinder lock comprising a rotatable tumbler;  
a coupling member rotationally linked to said tumbler, wherein rotation of said tumbler rotates said coupling member;  
a first vehicle locking element connected to said coupling member; and  
a second vehicle locking element connected to said coupling member, wherein rotation of said coupling member moves said first vehicle locking element in a translatory movement along a first axis and simultaneously moves said second vehicle locking element in a translatory movement along a second axis angled at a non-zero angle with respect to said first axis.
2. The multifunctional vehicle lock according to claim 1, wherein at least one of said first and second vehicle locking elements is geometrically lockable with respect to said coupling member.
3. The multifunctional vehicle lock according to claim 1, wherein said coupling member comprises a worm drive connected to said first vehicle locking element.
4. The multifunctional vehicle lock according to claim 3, wherein said first vehicle locking element is connected to said coupling member by a pin that fits in a helical groove formed in said worm drive, wherein as said coupling member rotates, said pin translates along said first axis guided by said helical groove.
5. The multifunctional vehicle lock according to claim 4, wherein said helical groove has a terminal arcuate portion in which said pin is geometrically lockable with respect to said coupling member.
6. The multifunctional vehicle lock according to any of the preceding claims, wherein said second vehicle locking element is connected to said coupling member by means of a wrist pin and connecting element connection.
7. The multifunctional vehicle lock according to any of the preceding claims, wherein said tumbler of said cylinder lock comprises a set of tumbler pins that are movable to a shear line against a set of housing pins disposed in a first pin housing.
8. The multifunctional vehicle lock according to claim 7, further comprising a second pin housing wherein said tumbler pins are movable to a shear line against a set of housing pins disposed in said second pin housing.

9. The multifunctional vehicle lock according to any of the preceding claims, wherein said first and second lock elements are arranged to move in and out of a protective casing.
10. The multifunctional vehicle lock according to any of the preceding claims, further comprising a plurality of said second vehicle locking elements connected to said coupling member.
11. The multifunctional vehicle lock according to claim 10, wherein said second vehicle locking elements are extendable to equal lengths by rotation of said coupling member.
12. The multifunctional vehicle lock according to claim 10, wherein said second vehicle locking elements are extendable to different lengths by rotation of said coupling member.
13. The multifunctional vehicle lock according to any of the preceding claims, wherein at least one of said first and second vehicle locking elements comprises an attachment member.
14. The multifunctional vehicle lock according to claim 13, further comprising a locking attachment attached to said attachment member.
15. The multifunctional vehicle lock according to claim 14, wherein said locking attachment is rigid.
16. The multifunctional vehicle lock according to claim 14, wherein said locking attachment is flexible.
17. The multifunctional vehicle lock according to any of the preceding claims 1-16 and substantially as shown and described hereinabove.

For the Applicant,



David Klein, Patent Attorney  
Dekel Patent Ltd.

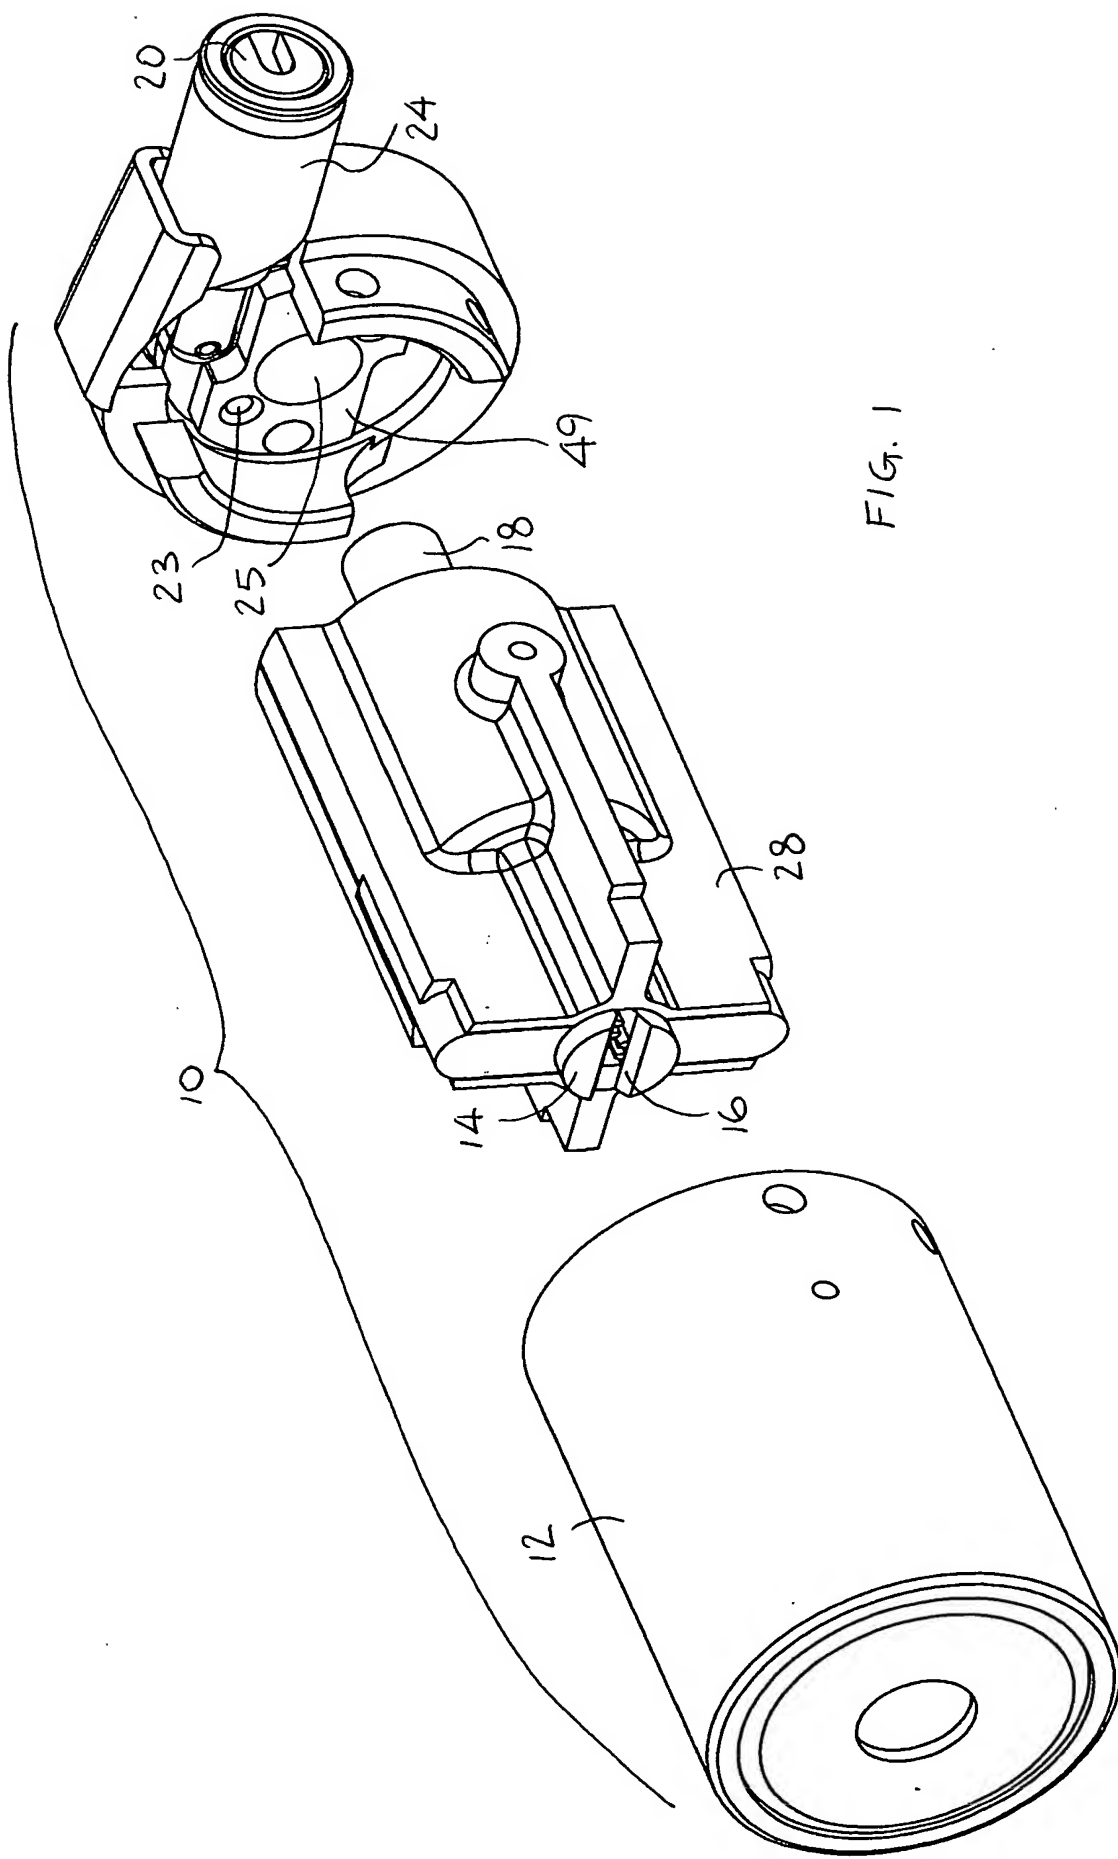


FIG. 1

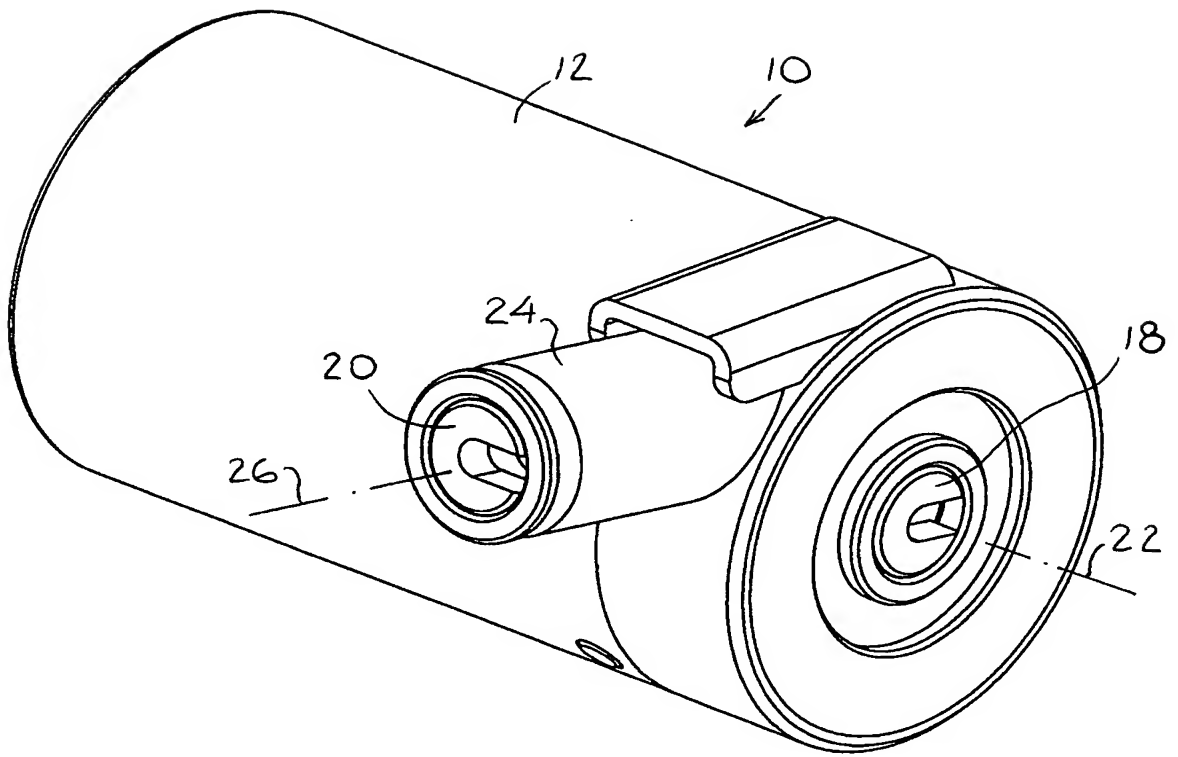


FIG. 2

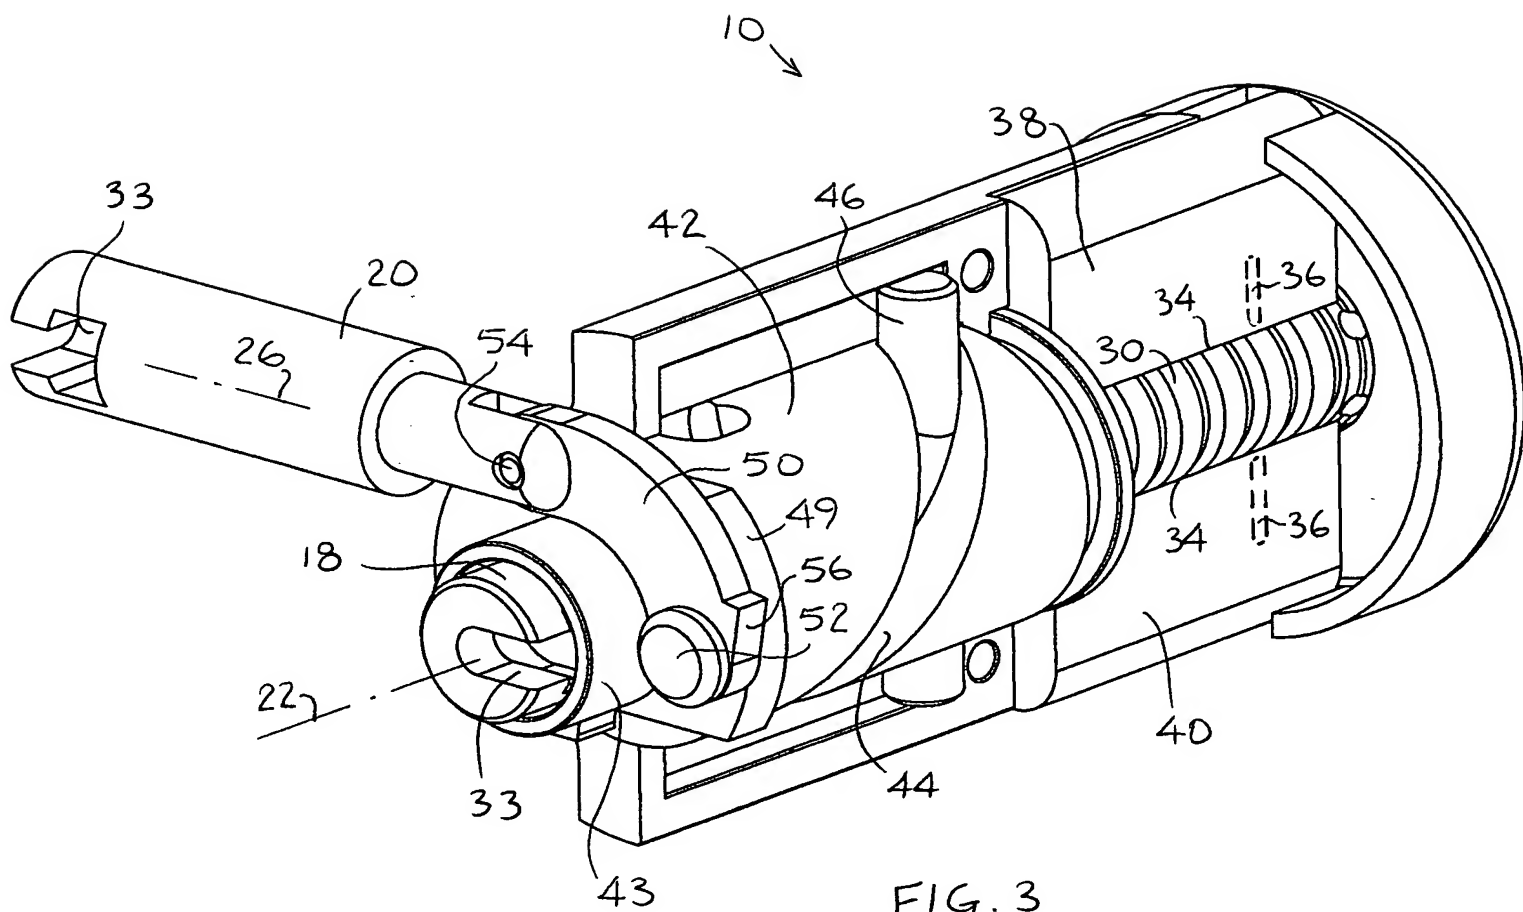


FIG. 3



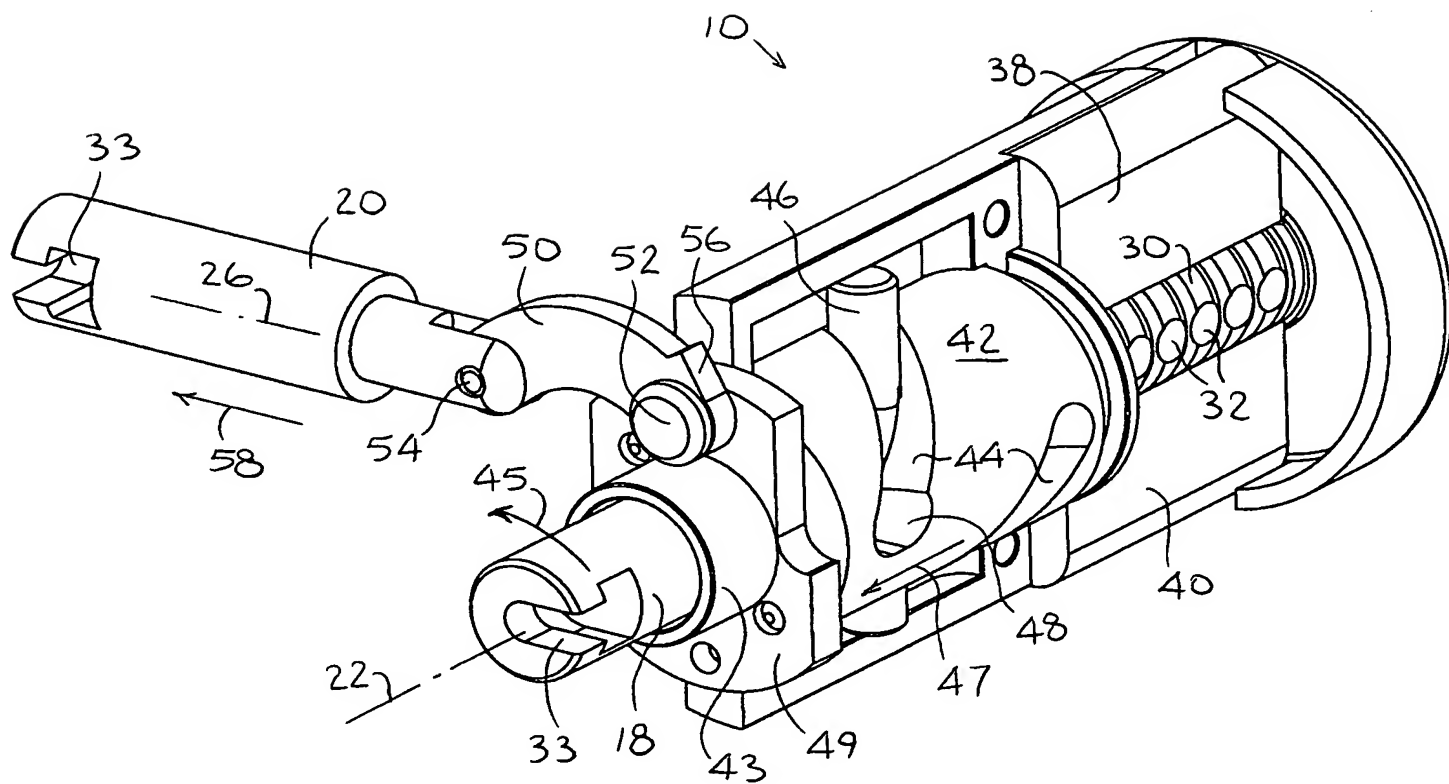


FIG. 4

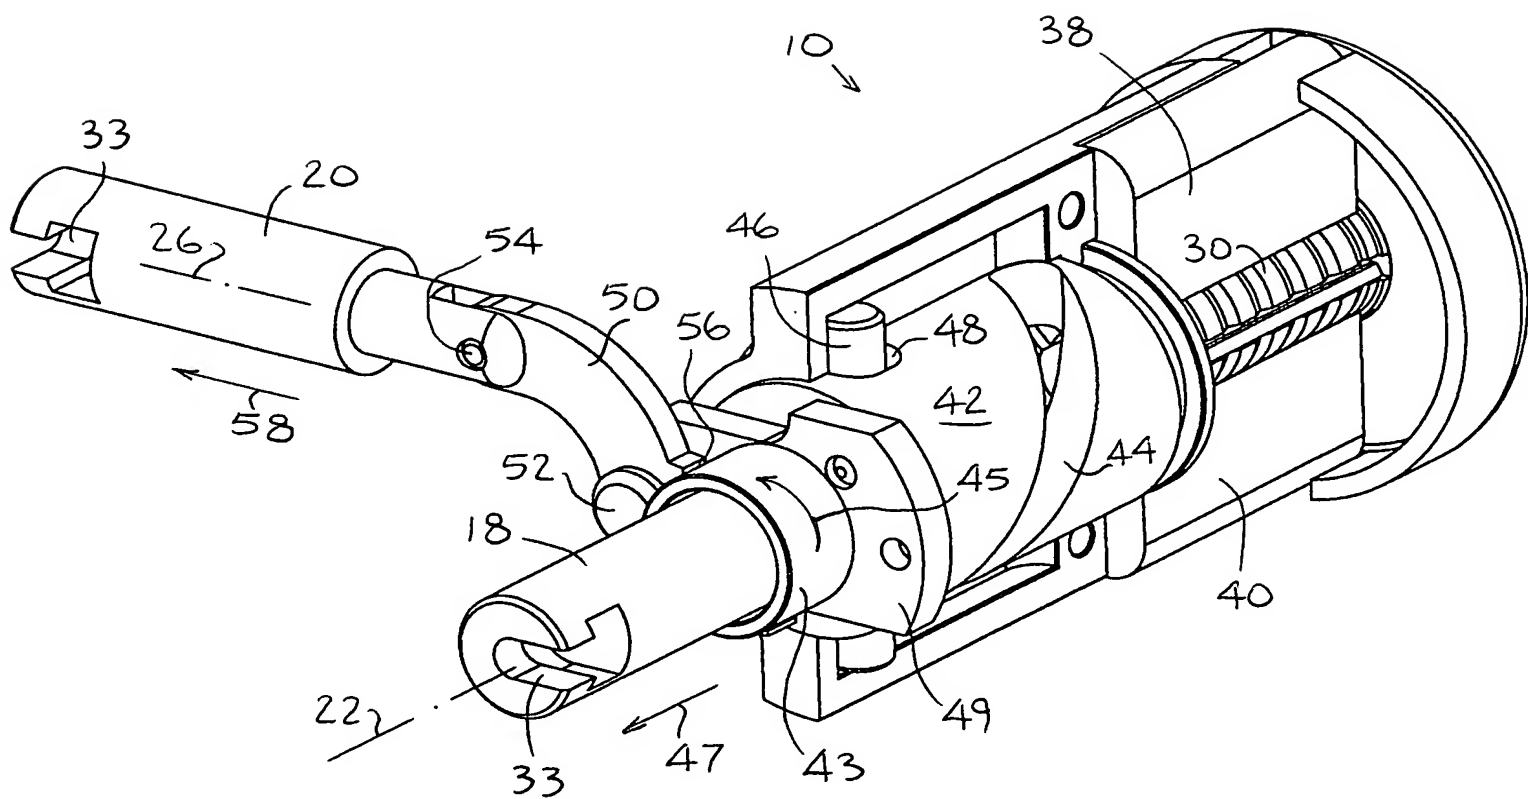


FIG. 5

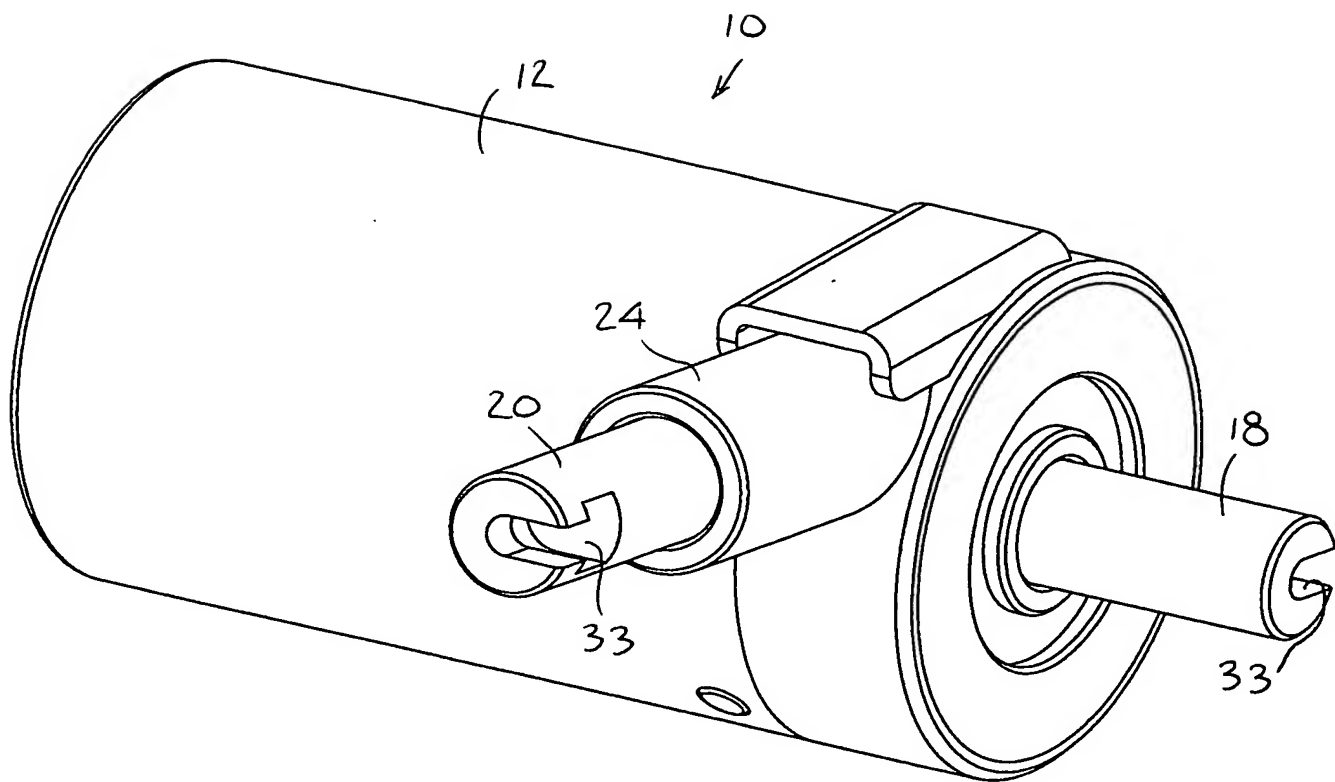


FIG. 6

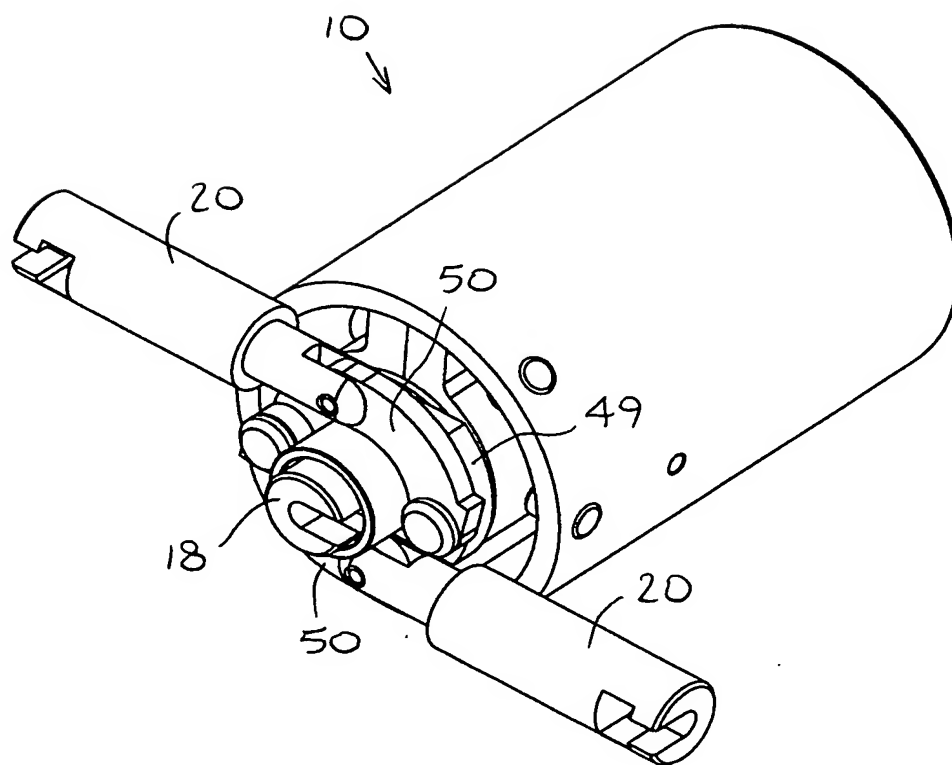


FIG. 7

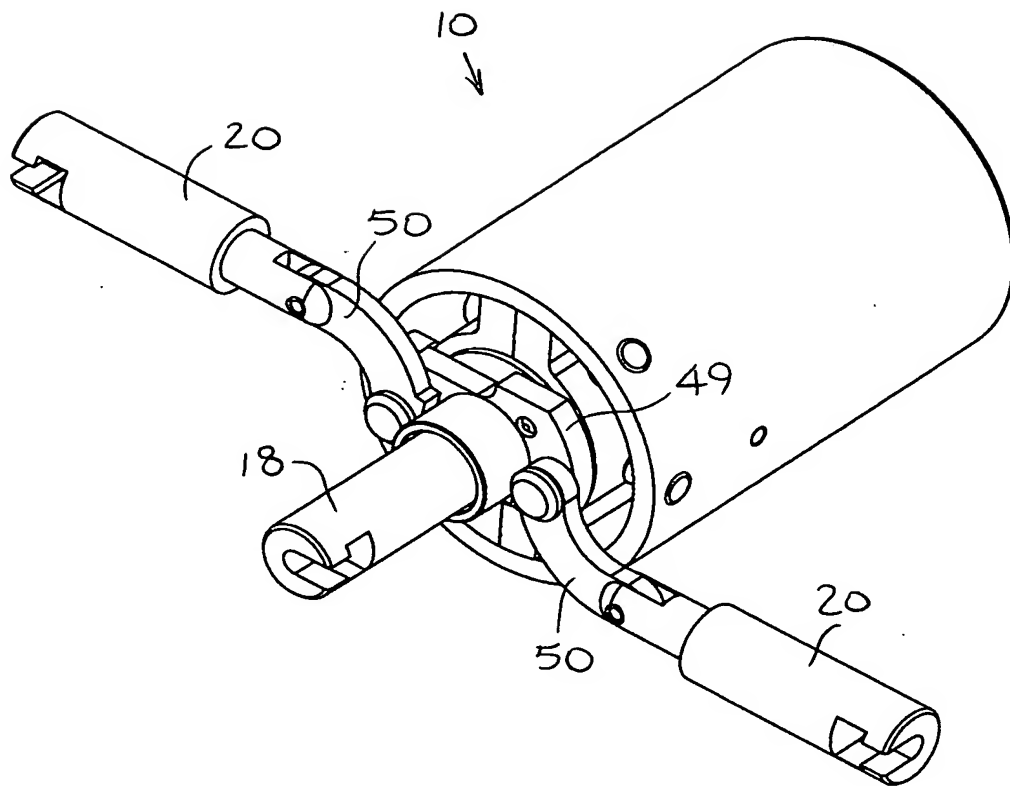


FIG. 8

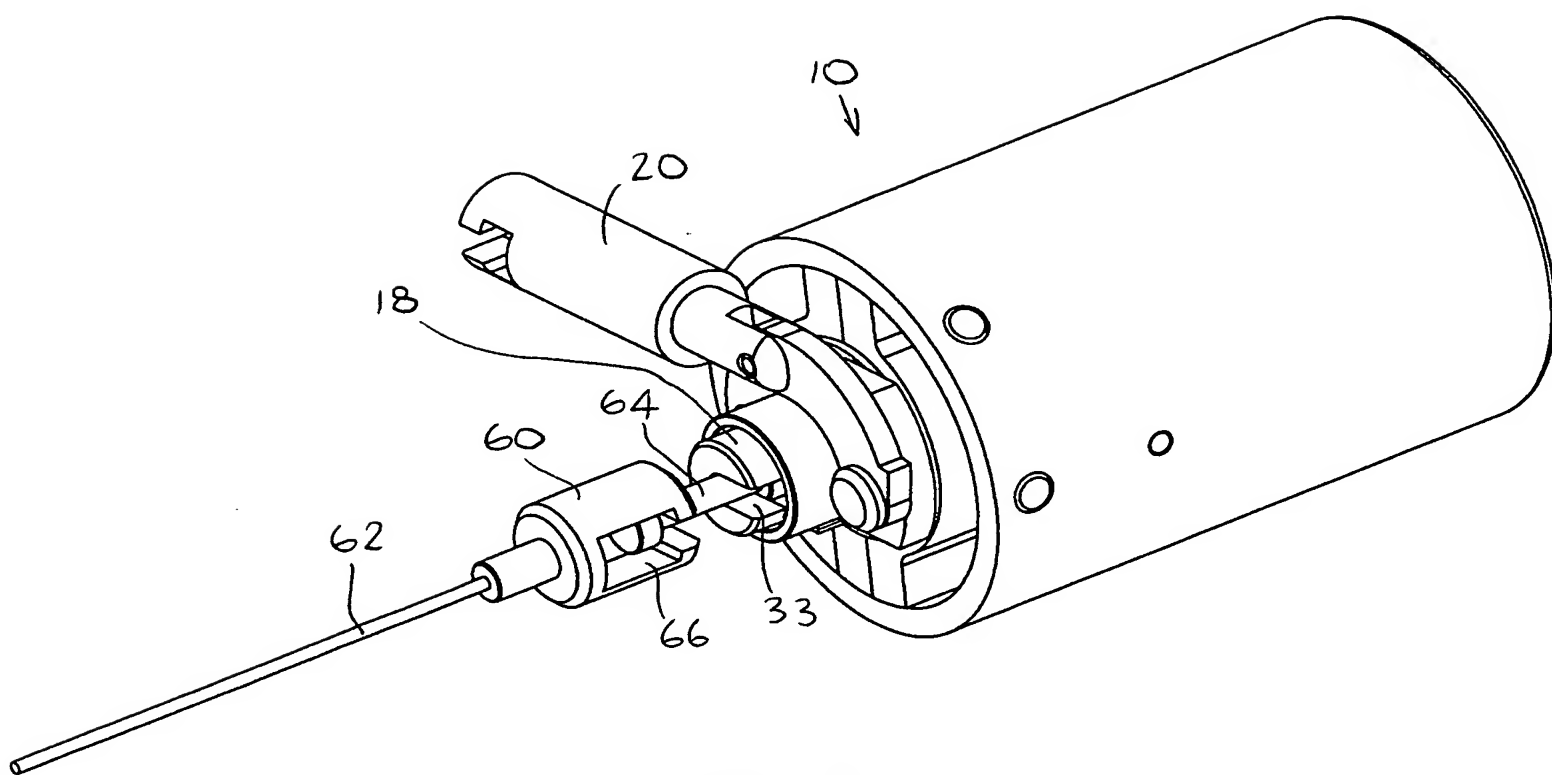


FIG. 9

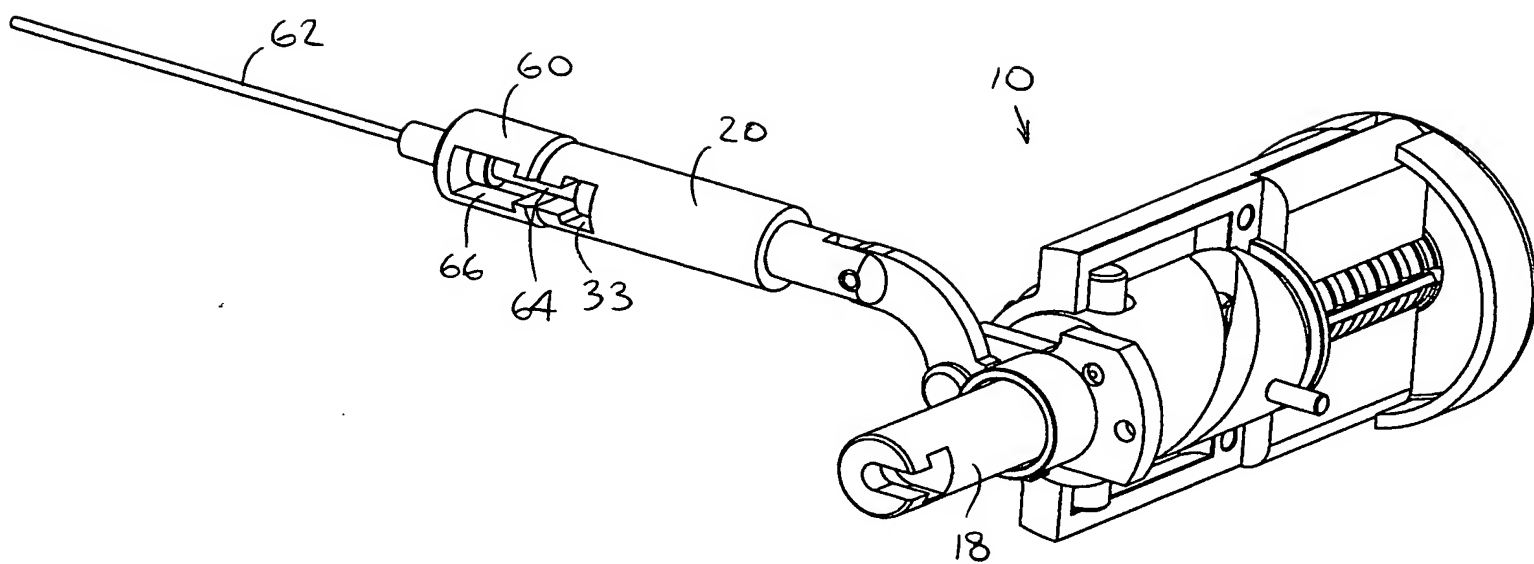


FIG. 10

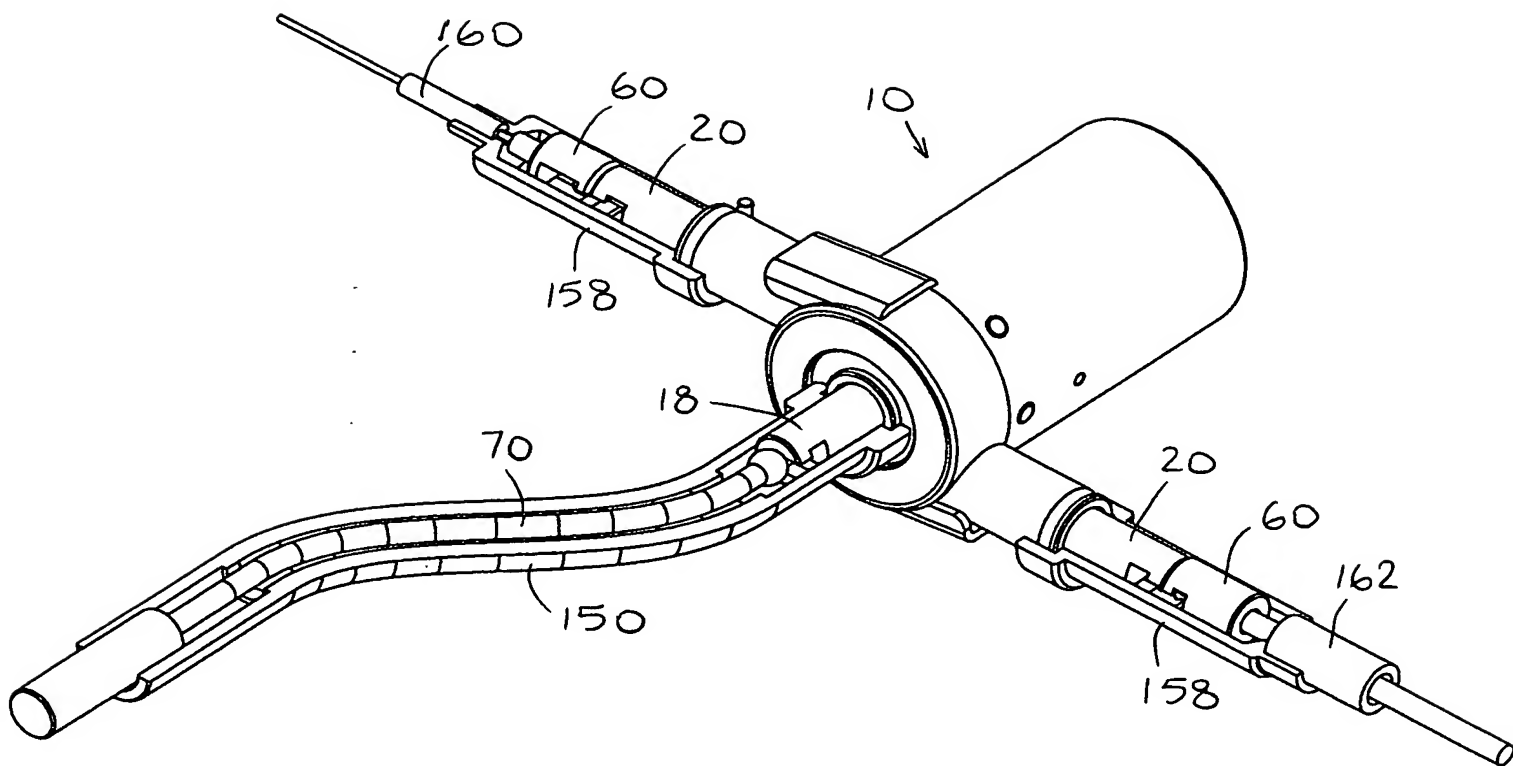


FIG. 11



